


7C Series 7.0x5.0 SMD Crystal Oscillator

FEATURE

- CMOS compatible logic levels.
- Pin-compatible with standard 7.0x5.0mm packages.
- High precision characteristic covering up to high frequency range.
- Low jitter and tight stability with fundamental or overtone Design.
- Low power standby mode.
- Output Tri-state function.
- Embossed taping specification.
- Reflow soldering.
- Pb-free and RoHS/Green compliant.

APPLICATIONS

- Ideally suited designed for discdrives,NB,Networking, GPS/Navigation,BlusTooth,Ethernet,ADSL,VDSL,Fiber channel hand-held electronic products.

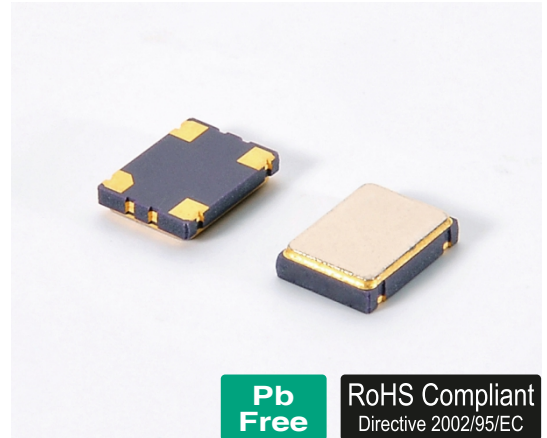

Pb Free



RoHS Compliant
Directive 2002/95/EC

Electrical Specifications 电气参数


型号	Holder Type	7.0x5.0mm SMD OSCILLATOR
频率范围	Frequency Range	1.000 Mhz to 150.000 MHz
总频差	Frequency Stability	±20ppm to ±50ppm
输入电压	Supply Voltage	5.0V or 3.3V ±10% ※(See Notes)
工作温度范围	Operating Temperature Range	-20°C - +70°C / -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C/-55°C - +125°C
占空比	Symmetry (Duty Cycle)	40/60 Standard
输出	Output Load	15pF Hcmos
消耗电流	Current Consumption (15pf only)	1.000Mhz - 35.999Mhz=25mA max
		(5.0V)
	Current Consumption (15pf only)	36.000Mhz - 69.999Mhz=60mA max
		(1.8V 2.5V 2.85V 3.3V)
上升/下降时间	Rise/Fall Time	1.000Mhz - 35.999Mhz=20mA max
		36.000Mhz - 69.999Mhz=40mA max
上升/下降时间	Rise/Fall Time	70.000Mhz - 150.000Mhz=60mA max
		5 nS max

※Notes:The supply voltage 1.8V,2.5V,2.85V also can be made by customer.

Mechanical Dimensions 外型尺寸

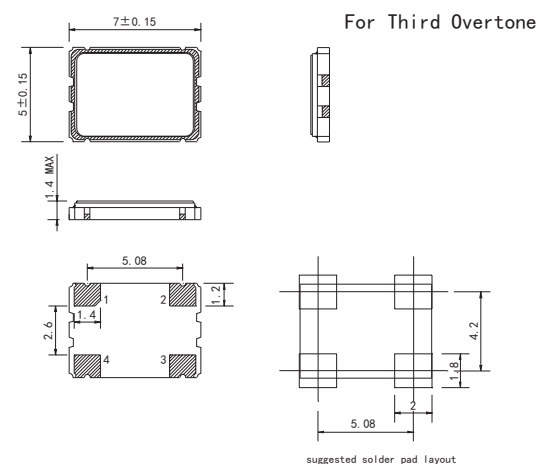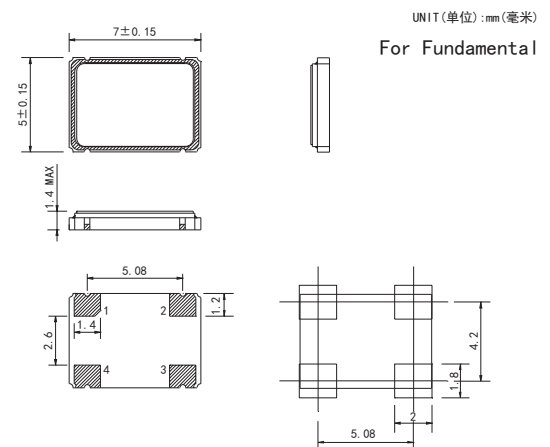

Test Circuit (测试电路)

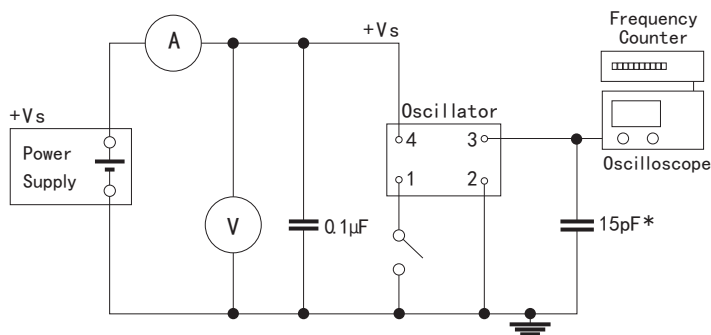

※Notes:

Tri-state: PIN 1 connected to Vdd or floating, the product is working properly;connected to GND, stops working.

PIN	FUNCTION
1	Tri-state※(See Notes)
2	Ground
3	Output
4	Vdd

SCTF

The above specifications are standard for SCTF product
If you have special requirement please Contact SCTF sales with your enquiries
Tel: 0086-0755-86097430, 0086-0755-86097250
Fax: 0086-0755-86097259
E-mail: sales@sctf-crystal.com <http://www.sctf-crystal.com>